

Data Sheet W4005 Series 5G Wideband Adapter

Designed for branches that require the higher performance of 5G and the flexibility of wireless, the Cradlepoint W-Series 5G Wideband Adapters usher in the next generation of Wireless WAN networking. The W-Series is designed to accommodate the diverse spectrums, multiple generations, and breadth of new technologies introduced in 5G while delivering enterprise-class standards of scalability, comprehensive management, and security.

Notable Features

- Increase the size and types of your WAN use cases with 5G performance
- Experience the dependability of dual connectivity with simultaneous 5G and 4G connections
- Gain carrier-class connectivity using a software-defined modem and integrated multilevel test and recovery utilities
- Deploy an enterprise-class 5G solution with greater simplicity and confidence with the wizard-based installation application
- Manage the Cradlepoint router and 5G adapter as one entity for singular control and visibility
- Evaluate the benefits of your 5G service with value confirmation tools built into the NetCloud Platform
- Reduce truck rolls with advanced Out-of-Band Management
- Deploy within any existing networking or SD-WAN environment

High Performance Wideband

The W-Series 5G Wideband Adapters are purpose-built for deployment in the new high-performance low-, mid-, and high-band 5G spectrum. To address the tradeoff of lower propagation, Cradlepoint designed the W-Series Adapter to be placed separately from the router for optimal signal reception with multiple available models. The W4005 5G Wideband Adapter has metal construction with an IP67 rating and is designated for outdoor deployment.

Designed for Enterprise-Class Business

While the performance of 5G is top of mind, the W-Series was also designed with enterprise-class standards for high scalability, comprehensive management, and security. Because 5G is a collection of new spectrum, new technologies, and new network infrastructure that is rolling out over several years, the Cradlepoint 5G edge networking service and endpoints accommodate the diverse deployments of an organization with hundreds or even tens of thousands of sites.

Performance

IP Passthrough Mode Throughput: Standard NAT Mode Throughput:

2.0 Gbps

Captive Modem Mode Throughput:

2.0 Gbps

ops

2.0 Gbps

Performance testing was conducted based on requirements as defined in RFC2544 using fixed-frame 1518 byte packets. Throughput results reflect uni-directional UDP traffic with less than 1% packet loss as tested with wired connections.

Results do not reflect performance of the cellular wireless operator networks.




Carrier-Class Connectivity

Although each network operator conforms to 3GPP standards, they implement those standards differently to gain optimal efficiency and performance from their network. Additionally, software from modem manufacturers is designed to serve multiple operators within broad markets. The W-Series uses a customized software-defined modem, pre-programmed endpoints, and multilevel integrity testing to predict vulnerable connections and deliver carrier-class connectivity.

5G Spectrum Solutions

The W-series portfolio supports all spectrum layers ensuring that organizations have the right solution for every location. The W2000 and W2005 support low- and mid-band layers while the W4005 supports low-, mid-, and high-band layers.

	letCloud							
	Deshboard	2	_					
4	Home GeoW	ew Modern Usage Cl	ienta Health	Traffic Security				
dada	Health > Devices	Lifecycle						
ŝ	Devices	Lifecycle						
6								
5					_			
								_
								
×	Jun 2020	Jul 2020 Aug 20	20 Sep 2020	Oct.2020 Nov	2020 Dec 2020	Jan 2021 Feb 2021	Mar 2021 /	lpr 2021 May 2021
12	201 2020	101000 100910	20 2020	0.12020 100	2020 000 2020	3812021 PR0 2021	100 2021	in and the second
<u>8</u> 3	Device ID				NCOS Version	Action Required By	Action Required in 1	How To Resolve
_		Device	Group	Product	NUUS VIRIERA	Action Required by	NCODE MEDICED II 1	
	-	Device	Group IBR6008	BR6008	6.4.2	12/21/2019	Expired	Upgrade NCOS Versio
	1000	889210-14	BRESCOR	1896008	642	12/31/2019	Expired	Upgrade NCOS Versio
			896008 A482200	IBR600B AER2200 ·	642 652	12/31/2019 04/25/2020	Expired Expired	Upgrade NCOS Versio
		80010-10 801201-00 80100-00	896008 A482200	IBH6008 AER2200 · AER3500	642 652 654	13/31/2019 04/25/2020 05/31/2020	Expired Expired Expired	Upgrade NCOS Versio Upgrade NCOS Versio Upgrade NCOS Versio




Support for a Full Range of Cellular Technologies

Cradlepoint 5G solutions support all cellular generations, from 4G LTE to Gigabit-Class LTE to 5G — with the ability to gracefully transition tens of thousands of sites between generations as technology becomes available in individual locations.

Complete Lifecycle Management

Cradlepoint 5G solutions help enterprises minimize complexity from installation to troubleshooting with tools and features such as the mobile installation application, the captive modem feature, 5G tools demonstrate 5G service value, and Out-of-Band Management.

na Edit 🔇 Delete 🔑 Con	ntrol								
Profile Name	Conditions		Availability						
		~	Ð		\odot	0=0	4	2	J
5G/LTE Multi-mode Modems	type is Modem + tech is 5G/LTE								
GAPTIVE Internal 5GA (SIM1)	(Connected)						٥		
LTE/3G Multi-mode Moderns	type is Modern + tech is LTE/3G					\$	۰		
L Internal C18B (SIM1)	(Connected)		Φ	\$	\$	\$	۰	Φ	
Ethernet-wan	type is Ethernet + uid is wan		Φ	\$	Φ	Φ	۰	Φ	
L Ethernet WAN (VID: 1)	(Connected)	Ø	۵	۵	\$	\$	۰	۵	
	LTE/3G Multi-mode Modems Internal C18B (SIM1) Ethernet-wan	L CAPTIVE Internal SGA (SIM1) (Connected) LTE/SG Multi-mode Moderns type is Modern * tech is LTE/SG L Internal C18B (SIM1) (Connected) Ethermot-wan type is Ethermot + uld is wan	LAPTIVE Internal SGA (SM1) (Connection) Connection UTEOD Add/mode Modern type is Modern tech is LTEOG b Internal C188 (SM1) (Connection) possible Ethemore wild is sum	CAPTWE Internal SGA (SM1) COnvected Convected	In CAPTIVE Internal SGA (SM1) (Connecting) Image: Connecting (Connect	Is QAPTIVE Internal SGA (SM1) Connecting) IV IV IV UTESO Michemis type is Molemer tech is LTEDIO IV IV	In CAPTVE Internal SGA (SM1) Connected Image: Conne	L CAPTNE Internal SGA (SM1) (Connecting) IV IV	Is OAPTIVE Internal GOA (SMIT) (Commented) Image: Commented in the Commented in LTEGO Market

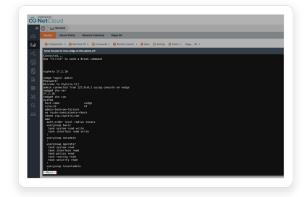

Intelligent Hybrid WAN Connectivity

Cradlepoint 5G solutions deliver effortless wireless endpoint management in a "wired-first SD-WAN" environment and provides all-in-one capabilities (routing, embedded wireless, and foundational SD-WAN) in a "wireless-first SD-WAN" deployment.



Hardware Specifications

The following features are delivered through the hardware.

INTERFACES	
Modem:	Embedded 5G NR FR1 and FR2 low-, mid-, high-band and 4G LTE Category 20 modem
Ethernet:	2 x 2.5 GbE RJ45 (LAN/WAN switchable)
Wi-Fi:	Single band 2.4 GHz — Endpoint setup only — 2x2 MU-MIMO 802.11ax Wi-Fi 6 — External 2x2 antennas
	— Global Safe Mode
Expansion / Console:	N/A
GNSS / GPS:	GNSS Muxed to DIV0:L1, and MIMO2:L5
ENVIRONMENTAL	
Temperature:	Operating: -30 °C to 70 °C (-22 °F to 158 °F) Storage: -40 °C to 85 °C (-40 °F to 185 °F)
Humidity:	Operating: 0% to 100% Storage: 0% to 100%
Ingress Protection:	IP67 (dust tight and water emersion up to 1 meter)
Wind / Shock Rating:	134 MPH sustained wind rating

POWER				
Required:	PoE			
	 PoE power injector included 802.3bt PSE Type 4 (90W) 			
PHYSICAL				
Size:	323 x 300 x 79 mm (12.72 x 11.8 x 3.11 in)			
Weight:	5.26 kg (11 lb 9.6 oz)			
CERTIFICATIONS				
Safety:	UL/cUL, CB Scheme			
Materials:	WEEE, RoHS3			
LEDs				
Refer to the W4005 Outdoor 5G Wideband Adapter Quick Start Guide.				




Enterprise-Class Modem Specifications

SPECIFICATION	W4005-5GB — OUTDOOR
Technology:	5G NR (low/mid-band FR1, high-band FR2) & 4G LTE Category 20 LTE Advanced Pro with Dual Connectivity — Dual SIM slots, mini 2FF form factor
Carrier Aggregation:	LTE only; up to 7CA downlink, 2CA uplink ENDC 5G + LTE; downlink & uplink supported.
	Refer to the Modem Carrier Aggregations article.
Peak Downlink Rates:	Up to 7.53 Gbps — based on 20 Layers LTE + TDD (100 MHz BW, 256 QAM, 4x4)
Peak Uplink Rates:	Up to 1.6 Gbps — based on 2 Layers LTE + TDD (100 MHz BW, 256 QAM, SISO)
MIMO:	4x4 MIMO
QAM:	Up to 256 — FR1
	Up to 64 — FR2
4G/LTE Bands:	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B46, B48, B66, B71
5G NR Bands:	Firmware 01.07.xx Firmware 03.09.03
	n1, n2, n3, n5, n28, n41, n66, n71, n77, n78, n79, n260, n261 — n1, n2, n3, n5, n7, n8, n12, n20, n25, n28, n38, n40, n41, n66, n71, n77, n78, n79, n260, n261
3G Bands:	B1, B2, B3, B4, B5, B6, B8, B9, B19
Power:	LTE only; 23 dBm \pm 1 (typical conducted)
	ENDC 5G + LTE; 20 dBm \pm 1 (typical conducted)
Antennas:	Low/mid-band FR1 5G & LTE
	 N-type female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 4, included)
	High-band FR2 5G
	— Internal 27.5-28.35 GHz, 37-40 GHz high-power antenna array (8x8 included)
GNSS/GPS:	Passive GNSS (multiplex with DIV0/MIMO2 antenna ports)
SMS:	Yes
Regulatory:	FCC (U.S.), IC (Canada)
Network Operator Standards:	PTCRB (U.S., Canada)
Network Operator Certifications:	AT&T, Verizon†


[†]Cellular carriers and operators throughout the world may only require telecom industry certifications, like PTCRB or GCF, to operate on their network. Some carriers require additional testing and approval, beyond telecom certifications, to operate on their network. A carrier listed in the approvals section means Cradlepoint completed additional testing and acquired technical approval for that given carrier. Any carrier not listed may not require additional testing or approval beyond telecom industry certifications to operate on their network.




Hardware

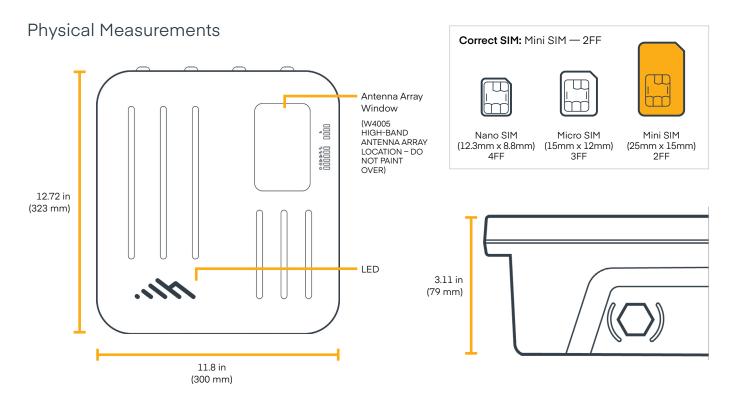

Sides

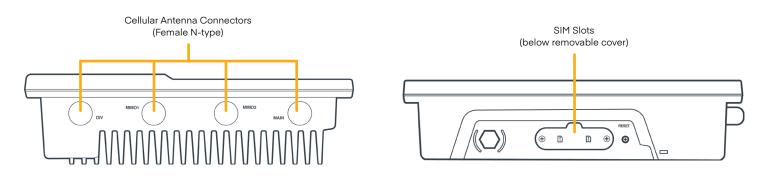

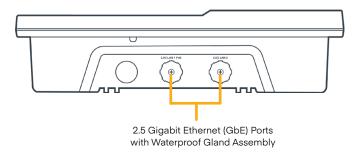



Ordering Guide

NetCloud Branch 5G Adapter Essentials + Advanced packages and plans full featured for 5G performance and connectivity. Essentials + Advanced packages include 24x7 support (phone support: 24 hour weekdays with emergency response on weekends, web: 24x7, chat: 24x5) and a limited lifetime warranty.

See additional details of what is included in the Essentials + Advanced NetCloud software: cradlepoint.com/netcloud-service

For more details on the W-Series Adapters, included with the Essentials + Advanced Packages, see below.

NetCloud Package & Plans

REGION	DESCRIPTION	PART NUMBER
North America: U.S. & Canada	NetCloud Branch 5G Adapter Essentials Plan, Advanced Plan, and W4005 Outdoor Adapter (5GB modem), NA	BEAx-40055GB-GN
United States: Federal Government	TAA Compliant NC Branch 5G Adapter Essentials Plan, Advanced Plan, and W4005 Outdoor Adapter (5GB modem), NA	TAA-BEAy-40055GB-GN
All Regions:	Renewal NetCloud Branch 5G Adapter Essentials Plan and Advanced Plan	BEAx-NCEA-R
		x = 1, 3, or 5 years y = 3 or 5 years

Accessories

INCLUDED	PART NUMBER
W4005-5GB GHz Outdoor 5G Wideband Adapter	
802.3bt 90 W PoE Injector	N/A
Cellular antenna, outdoor 5G Sub-6 (Qty 4)	N/A
Outdoor mounting plate	N/A
Pole mount clamp	N/A
Plate to assembly mounting screws & washers	N/A
Plate to W4005 mounting screws	N/A
OPTIONAL	PART NUMBER
PoE Injector, 56 V, 0.8 A, 90 W, single port 2.5 GbE 802.3bt	170827-000



Support & Warranty

The W-Series Adapters are only sold as components of Branch 5G Performance Adapter Essentials + Advanced Packages.

- NetCloud Packages include support for the full subscription term.
- All Cradlepoint hardware products are covered by a limited lifetime warranty for as long as they have a subscription license to an active NetCloud Service Plan.

Find the most up-to-date information at cradlepoint.com/w4005